

04-03-00

A

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (4/98)  
Approved for use through 09/30/2000. OMB 0651-0032  
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. **678-458 (P8993)**  
First Inventor or Application Identifier **Sung-Hwa GONG**  
Title **METHOD FOR USING MULTI-FUNCTION...**  
Express Mail Label No. **EL265552122US**

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ \* Fee Transmittal Form (e.g., PTO/SB/17)  
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages **27**]  
(preferred arrangement set forth below)
  - Descriptive title of the Invention
  - Cross References to Related Applications
  - Statement Regarding Fed sponsored R & D
  - Reference to Microfiche Appendix
  - Background of the Invention
  - Brief Summary of the Invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - Claim(s)
  - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets **14**]
4. Oath or Declaration [Total Pages **2**]
  - a. ☒ Newly executed (original or copy)
  - b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))  
(for continuation/divisional with Box 16 completed)
    - i. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

\* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

ADDRESS TO: Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
  - a. ☐ Computer Readable Copy
  - b. ☐ Paper Copy (identical to computer copy)
  - c. ☐ Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

7. ☒ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement ☐ Power of Attorney  
(when there is an assignee)
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
13. ☐ \* Small Entity Statement filed in prior application, Status still proper and desired (PTO/SB/09-12)
14. ☒ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)
15. ☒ Other: Check for \$1,180 (filing fee)  
Check for \$40 (recording fee)

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. \_\_\_\_\_  
Prior application information: Examiner \_\_\_\_\_ Group / Art Unit: \_\_\_\_\_

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

## 17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label ☒ Correspondence address below  
(Insert Customer No. or Attach bar code label here)

Name	Paul J. Farrell, Esq.				
Address	Dilworth & Barrese 333 Earle Ovington Blvd.				
City	Uniondale	State	NY	Zip Code	11553
Country	U.S.	Telephone	(516) 228-8484	Fax	(516) 228-8516

Name (Print/Type)	Paul J. Farrell, Esq.	Registration No. (Attorney/Agent)	33,494
Signature	<i>Paul J. Farrell</i>	Date	3/31/00

CERTIFICATION UNDER 37 C.F.R. § 1.10 I hereby certify that this correspondence and the documents referred to as enclosed are being deposited with the United States Postal Service on date below in an envelope as "Express Mail Post Office to Addressee" Mail Label Number EL265552122US addressed to: Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231.

Dated: 3/31/00

Paul J. Farrell

Atty. Docket No. 678-458IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Assistant Commissioner for Patents  
Washington, D.C. 20231

UTILITY APPLICATION FEE TRANSMITTAL

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): Sung-Hwa GONGFor: METHOD FOR USING MULTI-FUNCTION KEY IN A PORTABLE  
PHONE

Enclosed are:

- [x] 18 page(s) of specification  
[x] 1 page(s) of Abstract  
[x] 8 page(s) of claims  
[x] 14 sheets of drawings [ ] formal [x] informal  
[x] 2 page(s) of Declaration and Power of Attorney  
[x] An Assignment of the invention to Samsung Electronics Co., Ltd.

CERTIFICATION UNDER 37 C.F.R. §1.10

I hereby certify that this New Application Transmittal and the documents referred to as enclosed therein are being deposited with the United States Postal Service on this date March 31, 2000 an envelope as "Express Mail Post Office to Addressee" Mail Label Number EL265552122US addressed to: Assistant Commissioner of Patents and Trademarks, Washington, D.C. 20231.

  
Paul J. Farrell

☒ Certified copy of application

<u>Country</u>	<u>Appln. No.</u>	<u>Filed</u>
Korea	11667/1999	April 2, 1999

from which priority under Title 35 United States Code, §119 is claimed

☒ is enclosed.

☐ will follow.

CALCULATION OF UTILITY APPLICATION FEE

For	Number Filed	Number Extra	Rate	Basic Fee
Total				\$760.00
Claims*	39 - 20 =	19	x \$ 18.00	\$342.00
Independent				
Claims	4 - 3 =	1	x \$ 78.00	\$ 78.00
Multiple	<input type="checkbox"/> yes	Add'l. Fee	\$260.00	\$
Dependent				
Claims	<input checked="" type="checkbox"/> no	Add'l. Fee	None	= \$ .00
TOTAL				\$1,180.00

☐ Verified Statement of "Small Entity" Status Under 37 C.F.R. §1.27. Reduced fees under 37 C.F.R. § 1.9(f) (50% of total) paid herewith \$\_\_\_\_\_.

☒ The amount of \$40.00 for recording the attached Assignment is included in the enclosed check.


☒ A check in the amount of \$1,220.00 to cover the ☒ recording, ☒ filing fee(s) is attached.

☐ Charge fee to Deposit Account No. 04-1121. Order No. \_\_\_\_\_  
TWO (2) COPIES OF THIS SHEET ARE ENCLOSED.

\*Includes all independent and single dependent claims and all claims referred to in multiple claims.  
See 37 C.F.R. § 1.75(c).

[X] Please charge any deficiency as well as any other fee(s) which may become due under 37 C.F.R. § 1.16 and 1.17, at any time during the pendency of this application, or credit any overpayment of such fee(s) to Deposit Account No. 04-1121. Also, in the event any extensions of time for responding are required for the pending application(s), please treat this paper as a petition to extend the time as required and charge Deposit Account No. 04-1121 therefor. TWO (2) COPIES OF THIS SHEET ARE ENCLOSED.

Date: March 31, 2000

  
\_\_\_\_\_  
Signature of Attorney  
Paul J. Farrell  
Reg. No. 33,494  
Attorney for Applicant

DILWORTH & BARRESE  
333 Earle Ovington Blvd.  
Uniondale, NY 11553  
Tel. No. (516) 228-8484  
Fax. No. (516) 228-8516

PJF/MM:mg

**METHOD FOR USING MULTI-FUNCTION KEY IN A PORTABLE  
PHONE**

**PRIORITY**

5

This application claims priority to an application entitled "Method for using a multi-function key for Portable Phone" filed in the Korean Industrial Property Office on April 2, 1999 and assigned Serial No. 99-11667, the contents of which are hereby incorporated by reference.

10

**BACKGROUND OF THE INVENTION**

1. Field of the Invention

15

The present invention relates generally to a key input method to implement multiple functions in a portable phone, and in particular, a method for using a multi-function key for implementing in a portable phone multiple functions such as input of telephone numbers and characters with a single key.

20

2. Description of the Related Art

Various practical electronic appliances of original design have recently been put on the market along the trend toward consumer convenience and respect for individuality. Among them, a mobile radio terminal such as a portable phone is  
25 designed and fabricated in such a manner that the consumer demands for originality and practicality combined are satisfied. Generally, a communication

service provider offers a mailbox service (voice/data mailbox service) as an additional service to a mobile subscriber of a cellular phone or a PCS (Personal Communication Service). The mail box service notifies a calling party that a called party is not available when the portable phone of the called party is in a power-off mode or located in a non-service area, stores a voice message or data of the calling party in a mail box of a base station, and informs the called party of receipt of the voice message or data stored in the mail box when the called party is available.

Electronic appliances are equipped with multiple functions to enhance consumer's satisfaction. To invoke the multiple functions, a plurality of keys are provided with the electronic products. For example, a mobile terminal includes a plurality of keys such as the conventional 3x4 alphanumeric keys, function keys, an up/down key, and a menu key to perform functions like dialing and name registering.

From the user's perspective, many keys in a portable phone give rise to manipulation confusion and inconvenience rather than user-friendliness because users are obliged to learn what functions each of the multiple keys are used for. Multiple keys are not favorable to manufacturers since a large area occupied by the keys imposes constraints on product design and makes it difficult to satisfy various consumer tastes.

Though the idea of using the 3x4 keys for input of digits/characters and dialing has been fixedly accepted, a new and simple digit/character input method is needed.

## SUMMARY OF THE INVENTION

It is, therefore, an object of the present invention to provide a method for  
5 using a multi-function key for implementing multiple functions with a single key  
in an electronic product, especially a mobile communication terminal like a  
portable phone.

It is another object of the present invention to provide a method for using a  
10 multi-function key that allows a portable phone to be fabricated in an intended  
design without size constraints through the provision of a multi-function key.

It is a further object of the present invention to provide a method for using  
a multi-function key that is simpler to that of methods of using the conventional  
15 3x4 key mechanism.

It is still another object of the present invention to provide a method for  
using a multi-function key for entering digits/characters and dialing with a single  
multi-function key.

20

It is yet another object of the present invention to provide a method for  
using a multi-function key to enable a user of a portable phone to set multiple  
functions with a single multi-function key.

25 Briefly, these and other objects can be achieved by providing a portable  
phone having a multi-function key for generating a plurality of input signals. First,

menu items are displayed in a main menu upon generation of a first input signal by manipulating the multi-function key in a stand-by state, a menu item among a plurality of menu items is shifted to by generating a second input signal by manipulating the multi-function key, and the menu item is selected by generating a  
5 third input signal by manipulating the multi-function key.

### BRIEF DESCRIPTION OF THE DRAWINGS

The above and other objects, features and advantages of the present  
10 invention will become more apparent from the following detailed description when taken in conjunction with the accompanying drawings in which:

FIG. 1 is a block diagram of a portable phone to which the present invention is applied;

FIG. 2 is a perspective view of a watch-type portable phone with a multi-  
15 function key depicting an embodiment of the present invention;

FIG. 3 illustrates examples of a multi-function key according to an embodiment of the present invention;

FIG. 4 is a diagram depicting an example of a menu structure and the paths taken by manipulating the multi-function key according to an embodiment of  
20 the present invention;

FIG. 5 illustrates an example of a function menu list available in the function menu mode shown in FIG. 4;

FIG. 6 illustrates the total number of possible functions generated with a single-stage multi-function key according to an embodiment of the present  
25 invention;

FIG. 7 is a simple illustration of a two-stage sliding multi-function key



according to an embodiment of the present invention;

FIGs. 8A, 8B, and 8C are flowcharts illustrating a method for using a multi-function key for input of digits/characters using a multi-function key in a portable phone according to an embodiment of the present invention;

5        FIGs. 9A to 9G illustrate the display of a portable phone including digits/characters displayed by manipulating a multi-function key in the methods shown in FIGs. 8A, 8B, and 8C;

FIG. 10 illustrates the display of a portable phone showing a method to input English capital letters using the multi-function key according to an  
10    embodiment of the present invention; and

FIG. 11 is a flowchart illustrating the method for using a multi-function key for implementing other special functions according to an embodiment of the present invention.

## 15        **DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT**

A preferred embodiment of the present invention will be described hereinbelow with reference to the accompanying drawings. In the following description, well-known functions or constructions are not described in detail since  
20    they would obscure the invention in unnecessary detail.

FIG. 1 is a block diagram of a portable phone to which the present invention is applied.

25        In FIG. 1, a controller 11 provides overall control to the portable phone and controls a corresponding function to be invoked according to a multi-function

key input method in a keypad 21. A duplexer 12 feeds a radio signal received through an antenna (ANT) 112 to a radio receiver 13 and outputs a transmission signal received from a radio transmitter 15 through the antenna 112. The radio receiver 13 transmits received data to the controller 11 and a received radio voice  
5 signal to a voice processor 16 in a speech mode. A frequency mixer 14 generates a carrier cancellation signal to cancel an input carrier signal corresponding to an input channel under the control of the controller 11 and feeds the carrier cancellation signal to the controller 11. The frequency mixer 14 also generates a transmission carrier signal and transmits the transmission carrier signal to the radio  
10 transmitter 15. The radio transmitter 15 combines a voice signal received from the voice processor 16 with the carrier signal received from the frequency mixer 14 and feeds the combined signal to the duplexer 12 in the speech mode under the control of the controller 11. The voice processor 16 demodulates encoded voice data received from the radio receiver 13 and outputs the demodulated voice to a  
15 speaker (SPK) 113 through a switch 17. The voice processor 16 encodes an electrical voice signal received from a microphone (MIC) 114 through the switch 17 and transmits the encoded voice data to the radio transmitter 15.

A ringer 18 generates a ring sound upon receipt of a ring signal under the  
20 control of the controller 11. A memory 19 includes a ROM for storing programs required for the control operation of the controller 11, a non-volatile memory for storing telephone numbers and names, and a RAM for temporarily storing data generated during execution of the programs.

25 The keypad 21 has a multi-function key, and generates a plurality of key signals corresponding to user inputs using the multi-function key, and transmits the

key signals to the controller 11. A display 111 is preferably an LCD (Liquid Crystal Display), for example, and displays the status and operation of the portable phone under the control of the controller 11.

5 In a preferred embodiment of the present invention, information corresponding to a function selected by a user is displayed on the display 111 under the control of the controller 11. Upon receipt of corresponding multi-function key input signals, the display 111 displays information corresponding to digits (see, FIGs. 9A to 9C and FIG. 9G), characters (see FIG. 10), and symbols  
10 (see FIGs. 9E and 9F), which according to the current technology would be input by the 3x4 keys, function keys, up/down keys, and menu keys.

FIG. 2 is a perspective view of a watch-type portable phone 100 depicting an embodiment of the present invention. The portable phone includes a two-stage  
15 sliding key 10 as a multi-function key. The multi-function key 10 generates multiple key input signals depending on key presses, key slides to the left, and key slides to the right.

FIG. 3 illustrates various multi-function keys of an integrated multi-stage  
20 structure and a rotary structure according to the present invention. In FIG. 3, for generation of an input signal, a single-stage multi-function key is pressed down, a two-stage multi-function key is pressed down or is slide right or left, a three or more-stage multi-function key is pressed down or slide to another stage, and a rotary multi-function key is pressed down or turned. Different functions are  
25 invoked according to the number of presses, the duration of a press, and a sliding length. This list is not meant to be inclusive of all possible embodiments of a

multi-function key, as any type of multi-function key can be incorporated into the present invention.

FIG. 4 illustrates a function selecting method using a multi-function key in  
 5 a function menu mode with multiple stages and multiple functions according to the present invention.

Referring to FIG. 4, [I-I], [I-I-I], [I-I-I-I],..., [I-I-I-I-....] are sub-menus of a main menu [I]. Various child menus are displayed in the corresponding parent  
 10 menus (e.g., I-1, I-2,..., I-N in [I-I]). A parent menu is a particular sub-menu containing one or more child menus.

Reference character A in FIG. 4 indicates a first input signal or first input method of the multi-function key used to select either a specific sub-menu in the  
 15 main menu window or a specific child menu in a particular parent menu window. A solid line represents a transition from the main menu to a sub-menu or from a parent menu to a child menu.

Reference character B in FIG. 4 indicates a second input signal or second  
 20 input method of the multi-function key used to shift to another child menu in the same parent menu window. A dotted line represents a transition from one child menu to another child menu.

For example, to select I-1-2 in FIG. 4, a user chooses the first multi-  
 25 function key input method on the main menu window [I]. Then, the procedure goes in a path indicated by 401 so that child menus I-1, I-2,..., I-N under a parent

menu [I-I] are displayed on the LCD and a blinking cursor is placed on I-1. The user selects the first multi-function key input method to choose I-1 and then the procedure goes in a path indicated by 403. Child menus I-1-1, I-1-2,..., I-1-N under a parent menu [I-I] are displayed on the LCD and the blinking cursor is  
5 located on I-1-1. To shift to I-1-2, the user selects the second multi-function key input method so that the cursor moves to and blinks on the next child menu I-1-2 under the same parent menu. In this state, the user selects the first multi-function key input method to thereby choose I-1-2.

10 In the above example, the first multi-function key input method may be defined by pressing the key down one time and the second multi-function key input method by two successive press-downs. Alternatively, the input methods can be distinguished from each other according to the duration of key press. The multi-function key input methods will be described in reference to FIGs. 6 and 7.

15 Consequently, any menu item can be accessed with use of a single multi-function key.

FIG. 5 illustrates an example of a function menu list for a portable phone  
20 according to the function selecting methods using a multi-function key shown in FIG. 4. For example, as described in the above method of FIG. 4, the user can select the child menu item "3.RING VOLUME" indicated by reference numeral 501 by utilizing the above method of FIG. 4.

25 FIG. 6 illustrates the total number of functions produced with a single-stage multi-function key according to an embodiment of the present invention. By

way of example, the first and second input methods in FIG. 4 are defined as "short press" and "long press", respectively. According to the number of "short presses" 610, there exist the cases of "1 short presses" 611, "2 short presses" 612,..., "n short presses" 61n. Each individual case can be assigned a unique function, that is, 5 Func#1 621 to Func#n 62n. Other functions, f#1 through f#n, are derived from combinations of "short press" 610 and "long press" 630, such as (611+630) 641, (612+630) 651, through to (61n+630) 6n1.

As in the prior art, as the total number of the key presses to accomplish a 10 particular task is increased the user feels more and more inconvenienced. It is therefore preferable to limit the number of multi-function key manipulations required to complete a particular task to an optimal value. For example, if the number of "short presses" is limited to three, a total of seven function input methods are produced, including, 1 short press, 2 short presses, 3 short presses, 15 long press, 1 short press + long press, 2 short presses + long press, and 3 short presses + long press.

A multi-stage multi-function key will be described in connection to FIG. 7. FIG. 7 illustrates the number of function input methods possibly generated with a 20 two-stage sliding multi-function key. Here, the multi-function key is of the structure 10 shown in FIG. 2 and implemented by pressing down, sliding right, or sliding left as shown in FIG. 3. That is, the integrated two-stage sliding multi-function key involves functions possibly generated by pressing down 600 and functions 711, 721, 731, and 741 by right and left sliding, i.e., "left short" 720, 25 "left long" 710, "right short" 730, and "right long" 740.

In light of the foregoing, a multi-function key in the present invention is a single key capable of generating a plurality of input signals. Therefore, a fewer number of keys, including a multi-function key, may be substituted for the existing keypad having the conventional plurality of keys. Though function input methods  
5 and the number of possible function input methods have been described in the context of a single-stage multi-function key and a two-stage multi-function key in the embodiment of the present invention, they can also be contemplated in connection with other multi-stage multi-function keys and the rotary-type multi-function key shown in FIG. 3, and by the duration and number of key presses and  
10 key slides in various combinations. In addition, the multi-function key is not limited to an integrated slide type but can be, for example, a vertical multi-stage structure.

There will be given a description of a method for using a multi-function  
15 key for a portable phone having the two-stage sliding type multi-function key shown in FIGs. 2, 3, and 7.

FIGs. 8A, 8B, and 8C are flowcharts illustrating a digit/character input method using a multi-function key for a portable phone according to an  
20 embodiment of the present invention. FIGs. 9A to 9G illustrate information displayed on an LCD window according to a multi-function key input method. FIG. 10 illustrates an example of the entry of English capital letters with the multi-function key in an English capital letter input mode on the LCD window.

25 Digit/character entry using the multi-function key is characterized by user selection of digits (FIGs. 9A to 9C and FIG. 9G) and characters (FIGs. 9E and 9F)

by sliding the multi-function key right and left. Telephone number dialing, telephone number registering, and character entry will be described referring to FIG. 8A to 8C. The present invention is described on the assumption that the keypad 21 includes only the multi-function key or that it includes a send key, an end key, and a clear key as well as the multi-function key 10, depending on circumstances.

If the multi-function key 10 of the keypad 21 is pressed down long or the send key is pressed in a stand-by state, the controller 11 considers that a digit-input mode is set in step 801. In step 803, the controller 11 controls pre-stored digits to be displayed on the LCD with a blinking cursor located on a specific digit in step 805, as shown in FIG. 9A. A shaded portion is the current location of the cursor in FIG. 9A. The cursor moves right or left on the LCD 111 by user manipulation of the multi-function key 10 to the right or left. In step 807, the controller 11 moves the cursor to a specific digit that the user desires to select based on the key slides of the multi-function key 10 input by the user. Upon the user pressing down the multi-function key once for a short time with the cursor located on the specific digit in step 809, the controller 11 marks and displays the digit selected by the user with the digits displayed on the LCD 111 in step 811, as shown in FIG. 9B with [02-54]. In step 813, the controller 11 continuously checks whether the multi-function key 10 slides to the left or right, and if the multi-function key 10 slides the controller 11 returns to step 807. If the multi-function key is pressed down with a long press or the send key is pressed, the controller 11 considers that a dialing mode is set and dials a selected telephone number in step 817.

Instead of the dialing mode, a telephone number registering mode can be



entered into as shown in step 819 of FIG. 8B by moving the cursor to "REG." displayed on the LCD 111 and pressing down the multi-function key. An example of a display is shown in FIG. 9C. In step 821 the controller 11 displays on the LCD 111 addresses at which to store the telephone number to be registered. In step 5 823 the user selects an address by sliding the multi-function key to the left or right while viewing the addresses displayed on the LCD 111, and in step 825, the user presses down the multi-function key shortly to confirm the selected address. Then, the controller 11 goes to step 827. If no address is selected, the controller 11 returns to step 823. FIG. 9D shows the LCD window 111 displaying an address 10 selected and confirmed.

Upon entry of a long key press of the multi-function key or a press of the end key representative of a completed registration in step 827, the controller 11 in step 829 registers the telephone number at the determined address. Then, in step 15 831, the controller 11 transfers the function mode to a stand-by mode, initializes the LCD 111, and ends the procedure. The above example is one where the user registers a telephone number without a name.

In the alternative, in step 827, if the user desires to register a telephone 20 number with a name key instead of ending the registration, a character input mode is selected for name registration with use of the multi-function key, and the controller 11 sets the character input mode in step 900. The character-input mode is selected, for example, by pressing down the multi-function key twice or sliding the multi-function key to the left.

25

The character-input mode will be described in detail referring to FIG. 8C.

Upon selection of the character input mode, the controller 11 can display symbols (FIGs. 9E and 9F), digits (FIG. 9G), or letters (FIG. 10), depending on the character set the user selects. Because of size constraints, all of the digits and  
5 characters cannot be displayed fully at one time; an icon is displayed together with a set of digits/characters on the LCD 111 to allow the user to transfer to another set of digits/characters.

Upon selection of the character-input mode in step 900, the controller 11  
10 displays a character menu on the LCD 111 in step 901. For example, the character menu items may include "1. English capital letters, 2. English small letters, 3. Symbols..." In step 903, the user selects an intended character set by sliding the multi-function key to the left or right. The selected character set is displayed on the LCD 111 in step 905.

15

In step 907, the user moves the cursor to a specific character by sliding the multi-function key to the left or right, and then, in step 909, the user selects the specific character by a short key press of the multi-function key. The controller 11 marks and displays the selected character among the characters displayed in step  
20 911. Through a repetition of steps 907 to 913, intended characters can be selected. Meanwhile, the cursor shifts to another character by the user sliding the multi-function key to the left or right. A character on a different line may, for example, be selected by pressing down the multi-function key twice. If the user desires to select another character in the same character set in step 913, the procedure returns  
25 to step 907. If an intended character is in a different character set, the procedure returns to step 903 by the user selecting an icon indicating to display a different

character set through the "OR" step 914.

If the selected characters are confirmed by pressing down the multi-function key in step 915, the controller 11 ends the character input mode in step 5 917. In step 919, the controller 11 registers the user entered telephone number and name at the address selected in steps 823 and 825 and returns to step 831, thereby ending the procedure.

FIG. 10 illustrates an English capital letter input mode using the multi-  
10 function key. As an illustration, "HIT" is entered by way of example. Upon selection of "CAPs" in FIG. 9G, English capital letters are displayed. Among them, "H" is selected by shifting to "GH" by a left or right slide of the multi-function key and pressing down the multi-function key twice while the blinking cursor is located on "GH". "T" is entered by shifting to "IJ" by a left or right key  
15 slide of the multi-function key and pressing down the multi-function key once while the blinking cursor is located on "IJ". Then "I" is entered by shifting to "ST" by a left or right slide of the multi-function key and pressing down the multi-function key twice while the blinking cursor is located on "ST". Thus, "HIT" is completely displayed, and through a final manipulation of the multi-function key  
20 "HIT" is registered along with the telephone number, as shown in step 919.

As described above, through the use of a single multi-function key the present invention implements, for example, entry, registration, dialing of telephone numbers, character input, shifting between menu items, and setting functions. Any  
25 number of other and different functions can be implemented depending on the initial programming of the menu items.

FIG. 11 is a flowchart illustrating the method of using the multi-function key for implementation of other special functions according to an embodiment of the present invention. Referring to FIGs. 1 to 7 and FIG. 11, a simple vibrating mode setting function, a last number dialing function, and automatic speech dialing using the multi-function key will be described. Other functions in the function menu list shown in FIG. 5 can be implemented in the same manner. In this and other embodiments of the present invention a user can exit a particular function by pressing a predetermined key, for example an "Exit Function" key.

10

For example, a vibrating mode setting function 1100 is entered into if an input signal of a long left slide of the multi-function key is generated by the user while the phone is in a stand-by state in step 1101. The controller 11 determines whether a vibrating mode has been set in step 1103. If the vibrating mode has been set, the controller 11 releases the vibrating mode in step 1107. Otherwise, the controller 11 sets the vibrating mode in step 1105.

As another example a last number dialing function 1200 can be implemented if the multi-function key is pressed down twice successively in step 1201. In step 1203, the controller 11 displays a telephone number directory function menu on the LCD 111. Then in step 1205, a user slides the multi-function key to the left or right to shift to a last number viewing menu item. To shift to another menu item, the user performs a short left or a short right slide of the multi-function key. In step 1209, if the user inputs a short press of the multi-function key with the cursor blinking on the last number viewing menu item, the controller 11 selects the last number-viewing mode and displays a list of

previously dialed telephone numbers. In step 1211, the controller 11 shifts to an intended last number by user sliding the multi-function key to the left or right. Upon the user pressing down the multi-function key once, the controller 11 in step 1213 dials the selected last number.

5

As another example, for an automatic speech dialing function 1300, upon receipt of an input signal representative of long right slide of the multi-function key in step 1301, the controller 11 in step 1303 outputs an announcement through the speaker 113 requesting entry of a name. In step 1305, the controller 11  
10 determines whether voice has been input through the microphone 114. Upon receipt of a voice speech input, the controller 11 compares, in step 1307, the received voice speech input with previously registered voice inputs. If a match is found, the controller 11, in step 1309, automatically dials the telephone number in the previously registered location. If they are different, the controller 11, in step  
15 1311, outputs through the speaker 113 an announcement requesting re-input of a voice speech input and returns to step 1305 awaiting a voice speech input that matches a registered voice input.

As described above, the method of using the multi-function key of the  
20 present invention is advantageous in that an area occupied by the conventional 3x4 alphanumeric keys is saved and digits/characters are entered more easily and more conveniently since multiple functions and entries are invoked by the manipulation of a single multi-function key.

25 While the invention has been shown and described with reference to a certain preferred embodiment thereof, it will be understood by those skilled in the

art that various changes in form and details may be made therein without departing from the spirit and scope of the invention as defined by the appended claims.

**WHAT IS CLAIMED IS:**

1. A method for entering data and selecting functions in a portable phone, the portable phone having a multi-function key for generating a plurality of  
5 input signals, comprising the steps of:

(a) displaying a plurality of menu items in a main menu upon generation of a first input signal by manipulating the multi-function key when the portable phone is in a stand-by state;

(b) shifting to a menu item by generating a second input signal by  
10 manipulating the multi-function key; and

(c) selecting the menu item by generating a third input signal by manipulating the multi-function key.

2. The method of claim 1, further comprising the steps of:

(d) displaying a plurality of menu items in a sub-menu if the selected  
15 menu item is the sub-menu;

(e) shifting to a sub-menu item by generating the second input signal by manipulating the multi-function key; and

(f) selecting the sub-menu item by generating the third input signal by  
20 manipulating the multi-function key.

3. The method of claim 1, further comprising the steps of:

(g) displaying a corresponding set of digits/characters if the selected menu item indicates a digit/character input mode;

(h) shifting to an intended digit/character by generating the second input  
25 signal by manipulating the multi-function key; and

(i) selecting the digit/character by generating the third input signal by manipulating the multi-function key;

(j) sequentially performing the steps (h) and (i) if a different digit/character is to be entered; and

5 (k) ending the digit/character input mode by generating a fourth input signal through manipulation of the multi-function key when digits/characters are completely entered.

4. The method of claim 3, further comprising the step of selecting a  
10 function if there exists the function related to the digit/character input mode when the fourth input signal is generated.

5. The method of claim 1, further comprising the step of directly entering a corresponding function if a specific input signal is generated in the  
15 stand-by state.

6. The method of claim 1, wherein the multi-function key is an integrated multi-stage structure.

20 7. The method of claim 6, wherein the multi-function key is a sliding switch.

8. The method of claim 1, wherein the multi-function key is a rotary switch.

25 9. The method of claim 7, wherein the plurality of input signals are



generated by a key press, a key slide right or a key slide left of the multi-function key, alone or in combination.

10. The method of claim 8, wherein the plurality of input signals are  
5 generated by a key press or a key rotation of the multi-function key, alone or in combination.

11. The method of claim 7, wherein the plurality of input signals are  
generated depending on the number and duration of the manipulations of the key.

10

12. The method of claim 8, wherein the plurality of input signals are  
generated depending on the number and duration of the manipulations of the key.

13. The method of claim 11, wherein the plurality of input signals are  
15 generated depending on the combination of the number and duration of the manipulations of the key.

14. The method of claim 1, wherein the multi-function key is an  
integrated two-stage sliding type and generates the input signals according to a  
20 number and a duration of a key press or a key slide.

15. The method of claim 2, further comprising the step of displaying  
corresponding information each time an input signal is generated.

25 16. The method of claim 4, further comprising the step of displaying  
corresponding information each time an input signal is generated.

17. The method of claim 2, further comprising the step of indicating the current position of a cursor by blinking the cursor.

5 18. The method of claim 3, further comprising the step of indicating the current position of a cursor by blinking the cursor.

19. A method for entering data and selecting functions in a portable phone, the portable phone having a multi-function key for generating a plurality of  
10 input signals, comprising the steps of:

displaying menu items in a main menu upon generation of a first input signal;

shifting to a menu item by generating a second input signal;

selecting the menu item by generating a third input signal; and

15 performing a predetermined function by generating a fourth input signal.

20. The method of claim 19, wherein the first to fourth input signals are predetermined among the plurality of input signals generated according to the number and duration of a key press, a key slide right or a key slide left of the  
20 multi-function key.

21. A method for using a multi-function key in a portable phone for inputting digits/characters in a digit/character input mode, the multi-function key generating a plurality of input signals according to a number and a duration of a  
25 key press, a key slide right or a key slide left of the multi-function key, comprising the steps of:

displaying a set of digits/characters upon generation of a first input signal by manipulating the multi-function key;

shifting to a digit/character each time an input signal is generated by sliding the multi-function key to the left or right while the set of digits/characters  
5 are displayed;

selecting the digit/character upon generation of a second input signal by manipulating the multi-function key; and

ending the digit/character input mode upon generation of a third input signal by manipulating the multi-function key.

10

22. The method of claim 21, further comprising the steps of displaying a digit/character selection menu for selecting a digit/character upon generation of the first input signal, selecting a specific digit/character by a fourth input signal generated by manipulating the multi-function key, and displaying the  
15 selected digit/character.

23. The method of claim 22, further comprising the step of marking the selected digit/character while digits/characters are displayed.

20 24. The method of claim 21, further comprising the step of blinking a cursor on the selected digit/character to indicate the selected digit/character.

25. The method of claim 23, further comprising the step of blinking a cursor on the selected digit/character to indicate the selected digit/character.

25

26. The method of claim 24, wherein the first to fourth input signals

are predetermined among the plurality of input signals generated by manipulating the multi-function key.

27. The method of claim 26, wherein the first to fourth input signals  
5 are generated according to the number and duration of the manipulations of the key.

28. The method of claim 21, further comprising the step of dialing the  
selected digits/characters as a telephone number upon generation of the third input  
signal.

10

29. The method of claim 22, further comprising the step of displaying  
an icon to transfer to another set of digits/characters.

30. The method of claim 29, further comprising the steps of:  
15 transferring to the another set of digits/characters by generating an input  
signal by manipulating the multi-function key; and  
displaying the another set of digits/characters.

31. The method of claim 30, further comprising the step of  
20 sequentially performing the steps of shifting, selecting and ending after the  
digit/character set indicated by the icon is displayed.

32. The method of claim 21, further comprising the step of shifting to  
another line of digits/characters upon generation of a predetermined input signal  
25 when the digits/characters are displayed in a plurality of lines.

33. A method for telephone number dialing using a multi-function key which generates a plurality of input signals according to a number and a duration of a key press, a key slide left, or a key slide right in a portable phone, comprising the steps of:

5 displaying digits/characters upon generation of a first input signal for input of a telephone number by manipulating the multi-function key in a main menu;

shifting a specific digit/character each time an input signal is generated through a key slide left or a key slide right;

10 selecting the digit/character upon generation of a second input signal by manipulating the multi-function key;

dialing the selected digits/characters as a telephone number upon generation of a third input signal by manipulating the multi-function key.

34. The method of claim 33, further comprising the step of blinking a  
15 cursor on the selected digit/character to indicate the selected digit/character.

35. The method of claim 34, wherein the first, second, and third input signals are predetermined among the plurality of input signals generated by manipulating the multi-function key.

20

36. The method of claim 35, wherein the first, second, and third input signals are generated according to a number and a duration of a manipulation of the key.

25 37. The method of claim 35, wherein the first, second, and third input signals are generated according a combination of a number and a duration of a

manipulation of the key.


38. The method of claim 36, further comprising the steps of:  
marking the selected digit/character while the digits/characters are  
5 displayed; and  
displaying the marked digits/characters.

39. The method of claim 37, further comprising the steps of:  
marking the selected digit/character while the digits/characters are  
10 displayed; and  
displaying the marked digits/characters.

## ABSTRACT OF THE DISCLOSURE

A method for using a multi-function key for a portable phone having a multi-function key for generating a plurality of input signals. First, menu items  
5 are displayed in a main menu upon generation of a first input signal according to manipulation of multi-function key in a stand-by state, an intended menu item is shifted to by generating a second input signal by manipulating the multi-function key, and the menu item is selected by generating a third input signal by manipulating the multi-function key.

FIG. 1

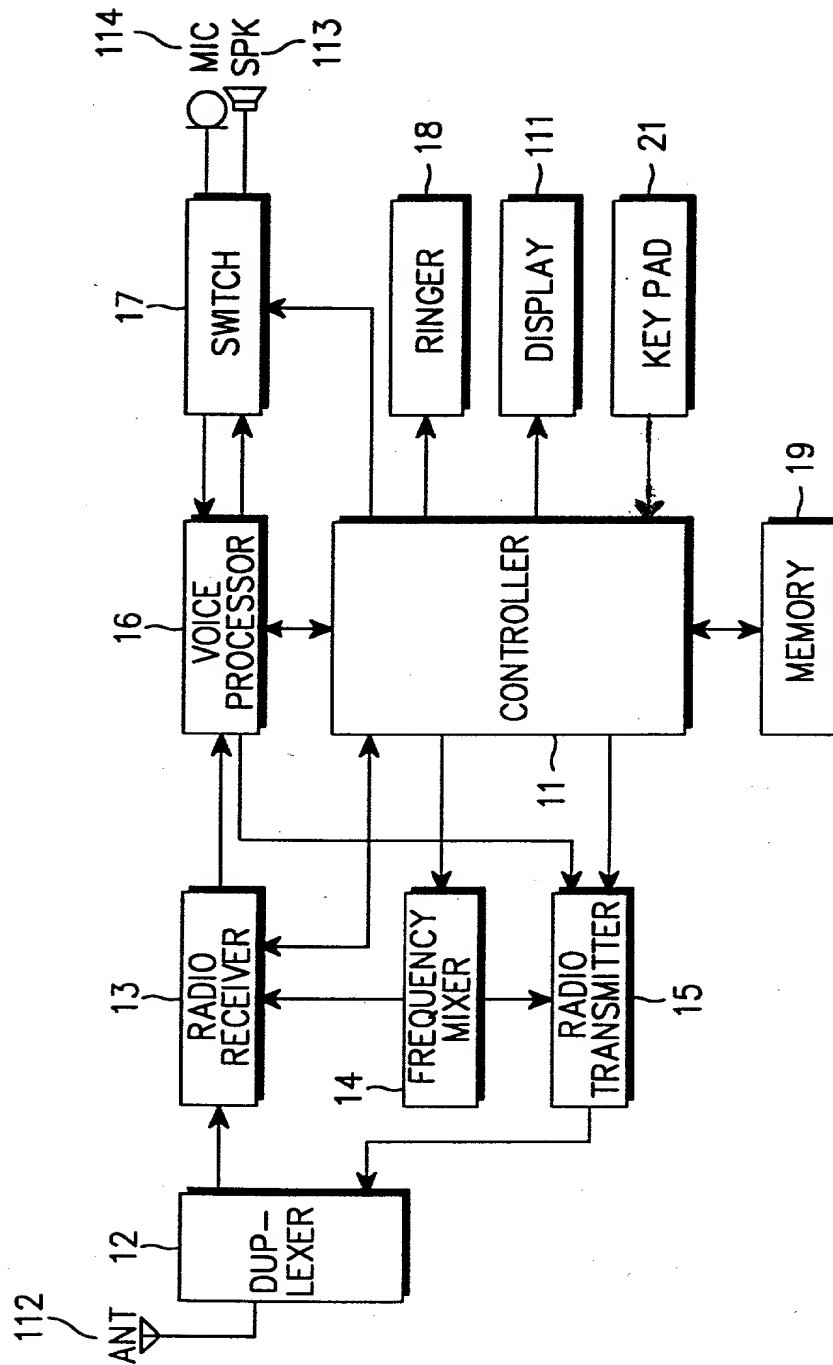




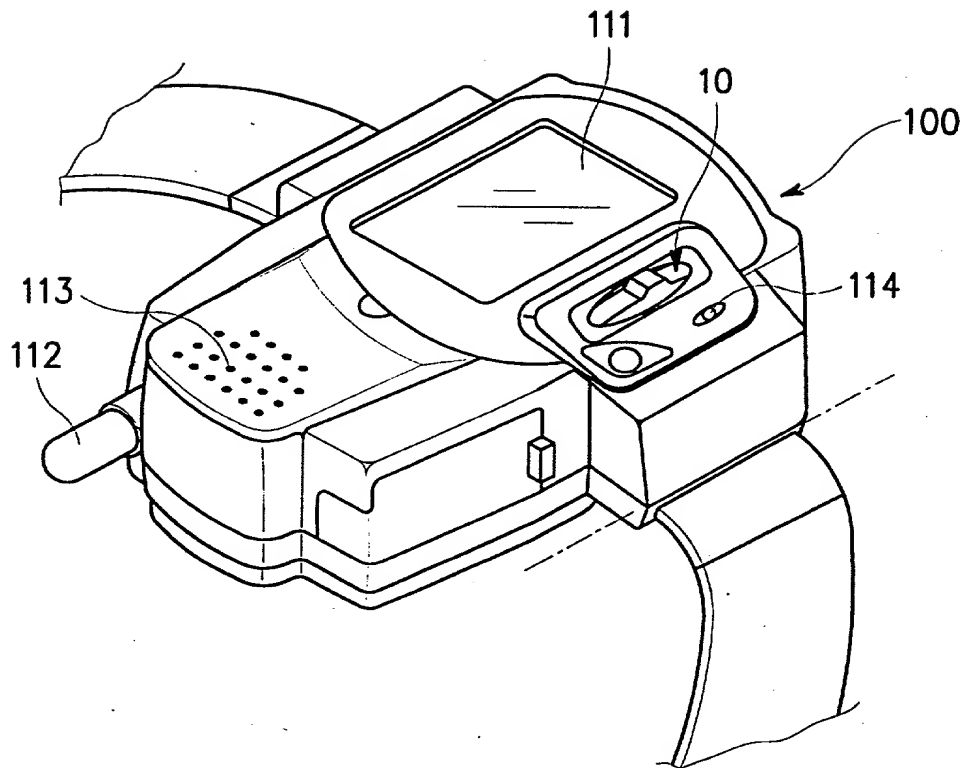



FIG. 2




SINGLE-STAGE  
MULTI-FUNCTION KEY




TWO-STAGE  
MULTI-FUNCTION KEY




THREE-STAGE  
MULTI-FUNCTION KEY



FOUR-STAGE  
MULTI-FUNCTION KEY



N-STAGE  
MULTI-FUNCTION KEY

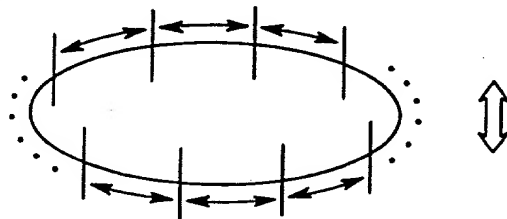

ROTARY  
MULTI-FUNCTION KEY

FIG. 3

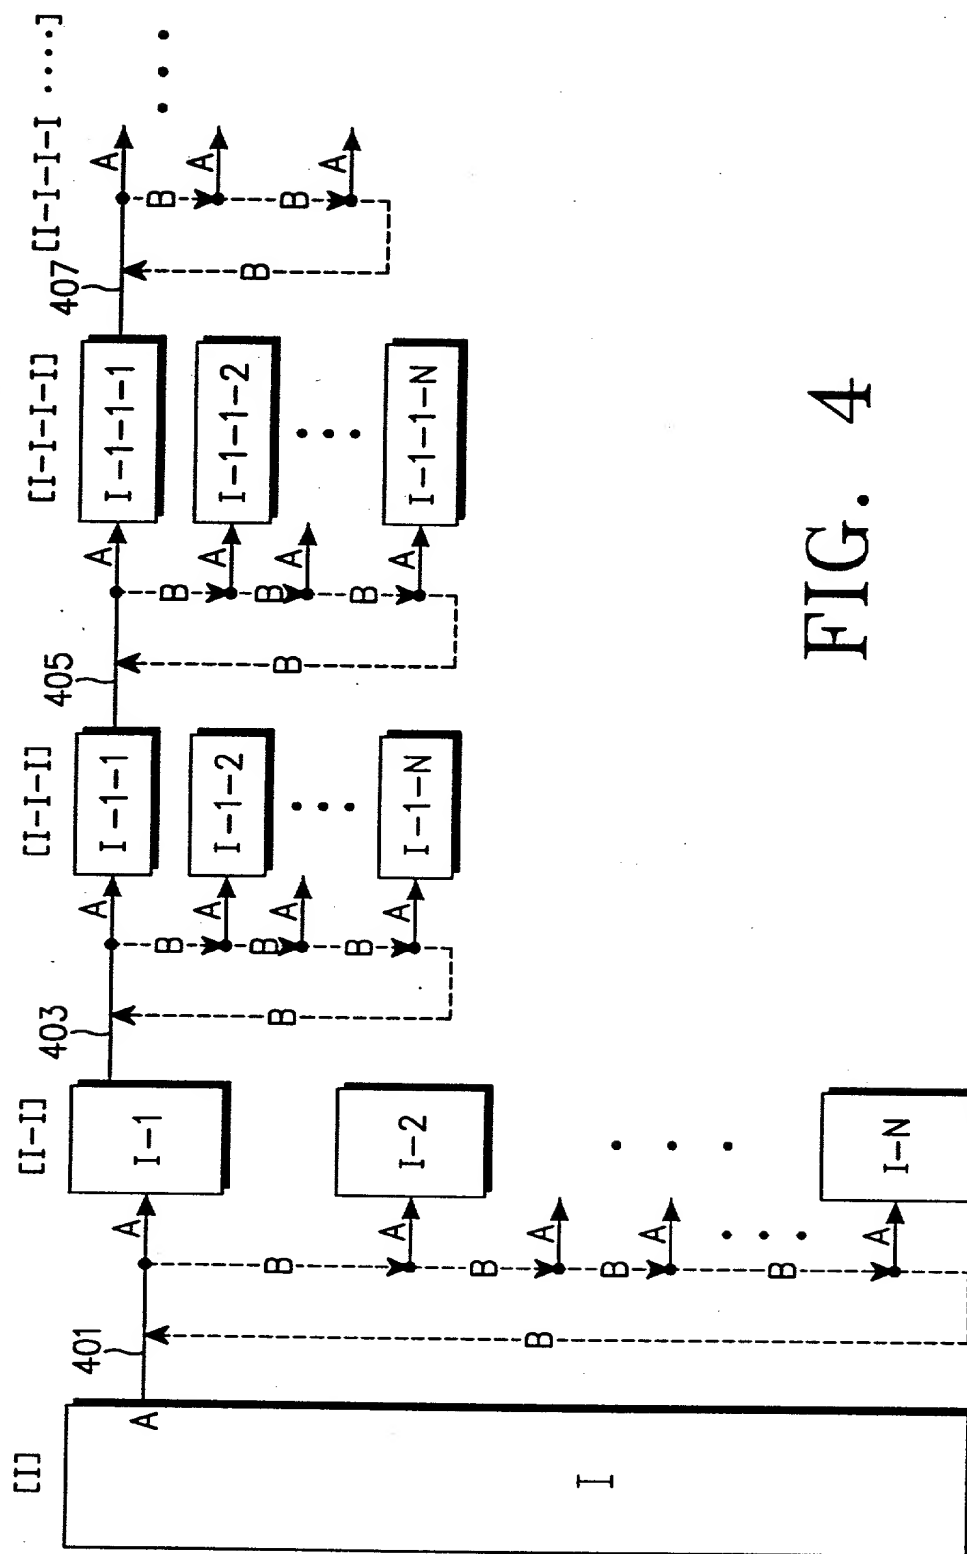


FIG. 4

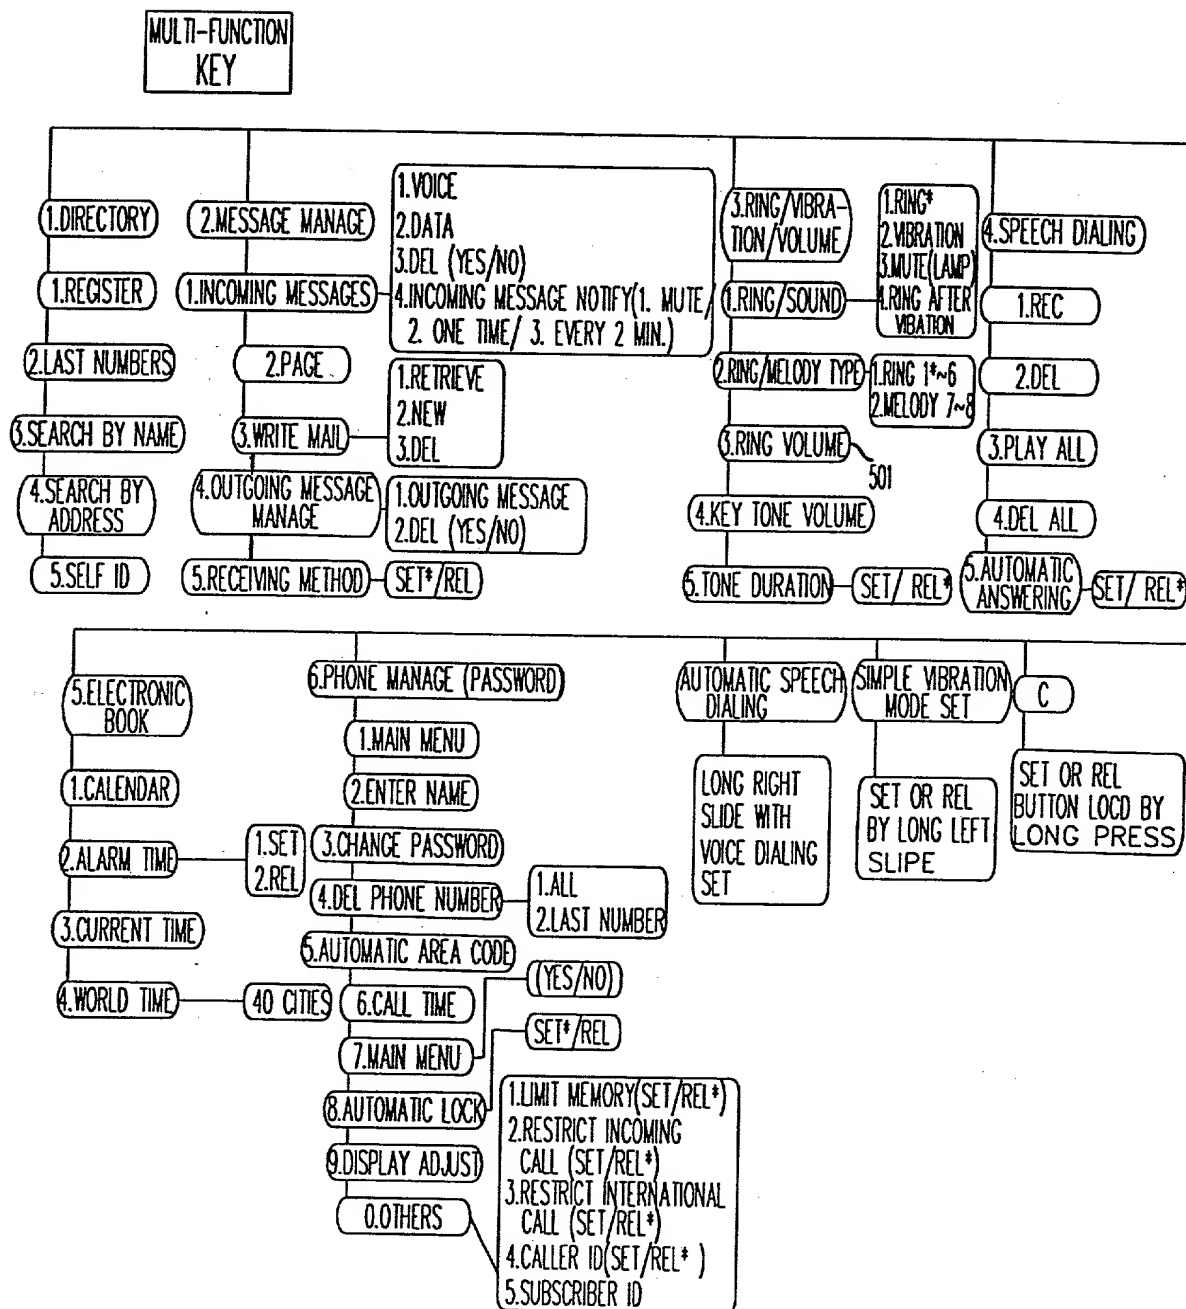


FIG. 5

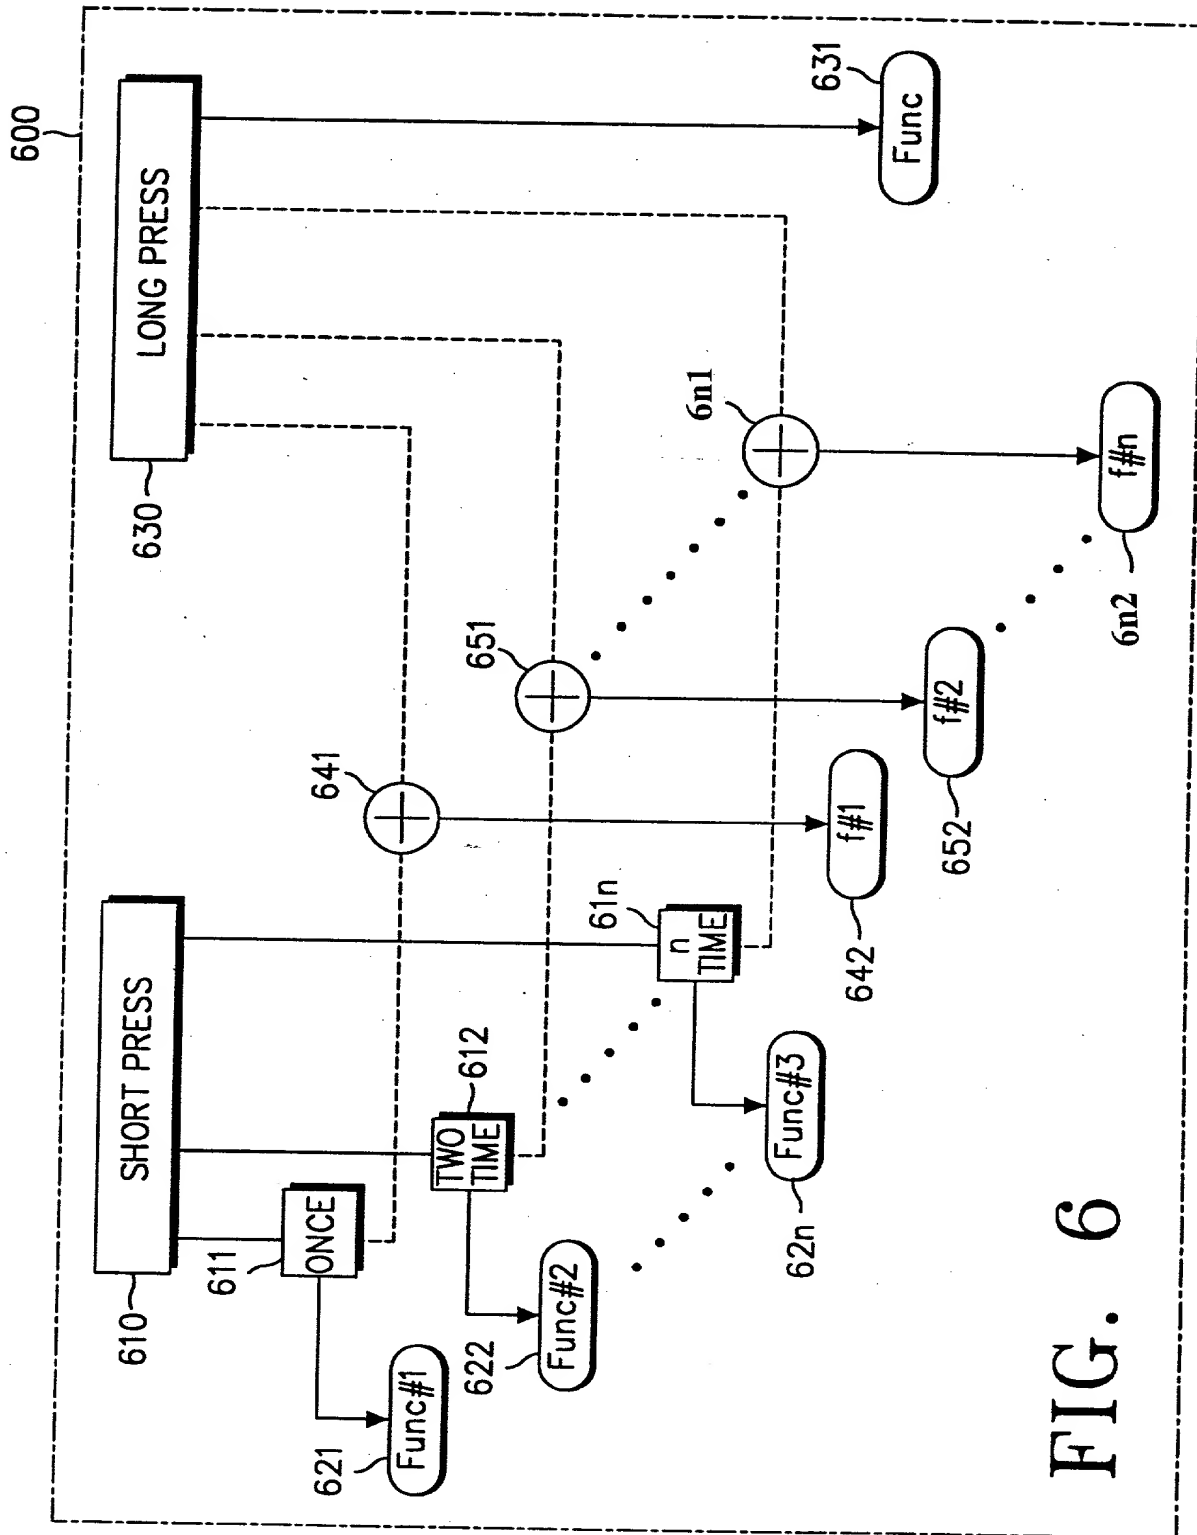


FIG. 6

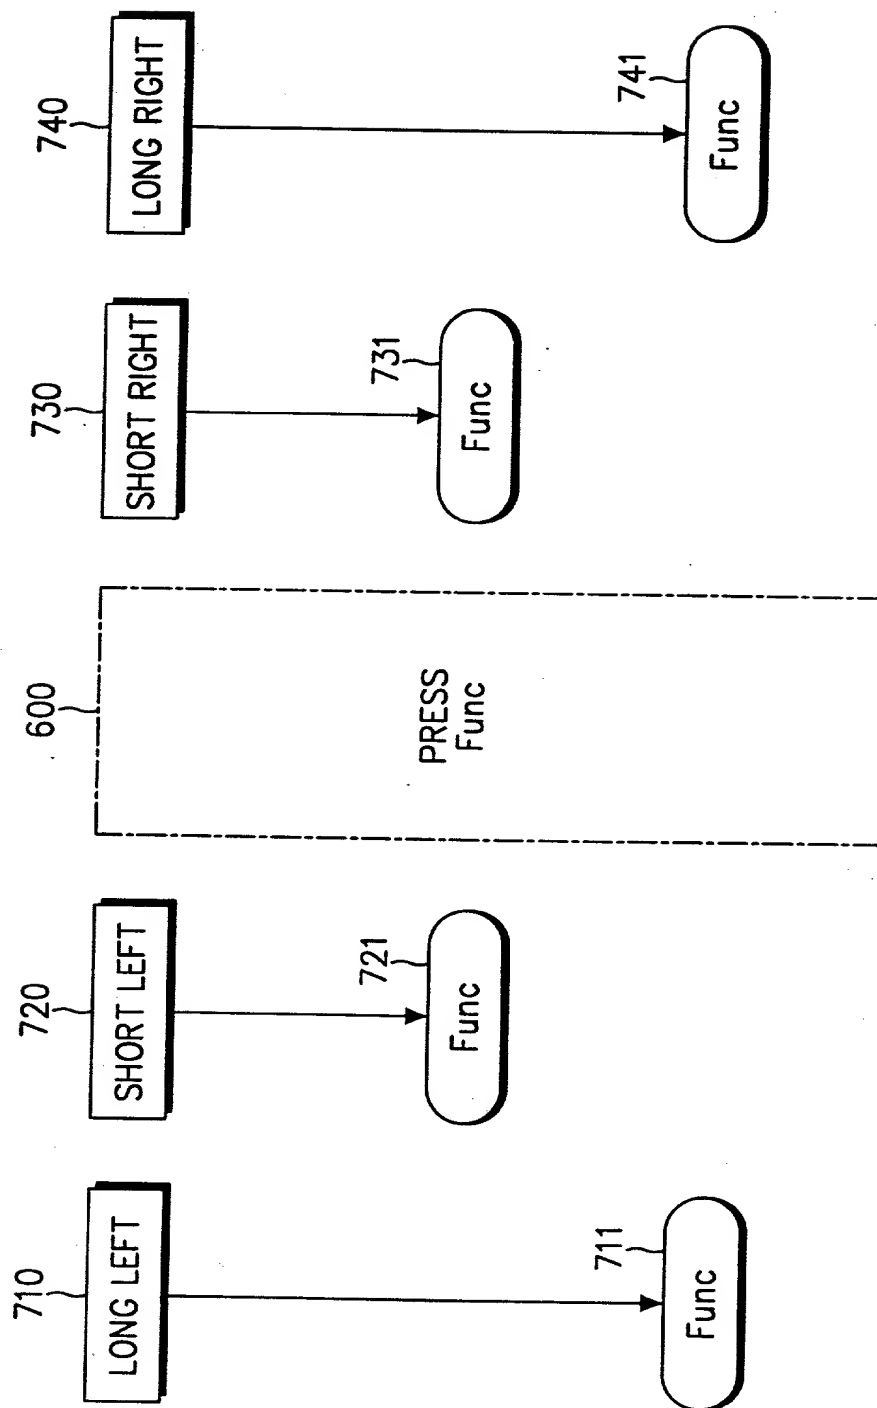


FIG. 7

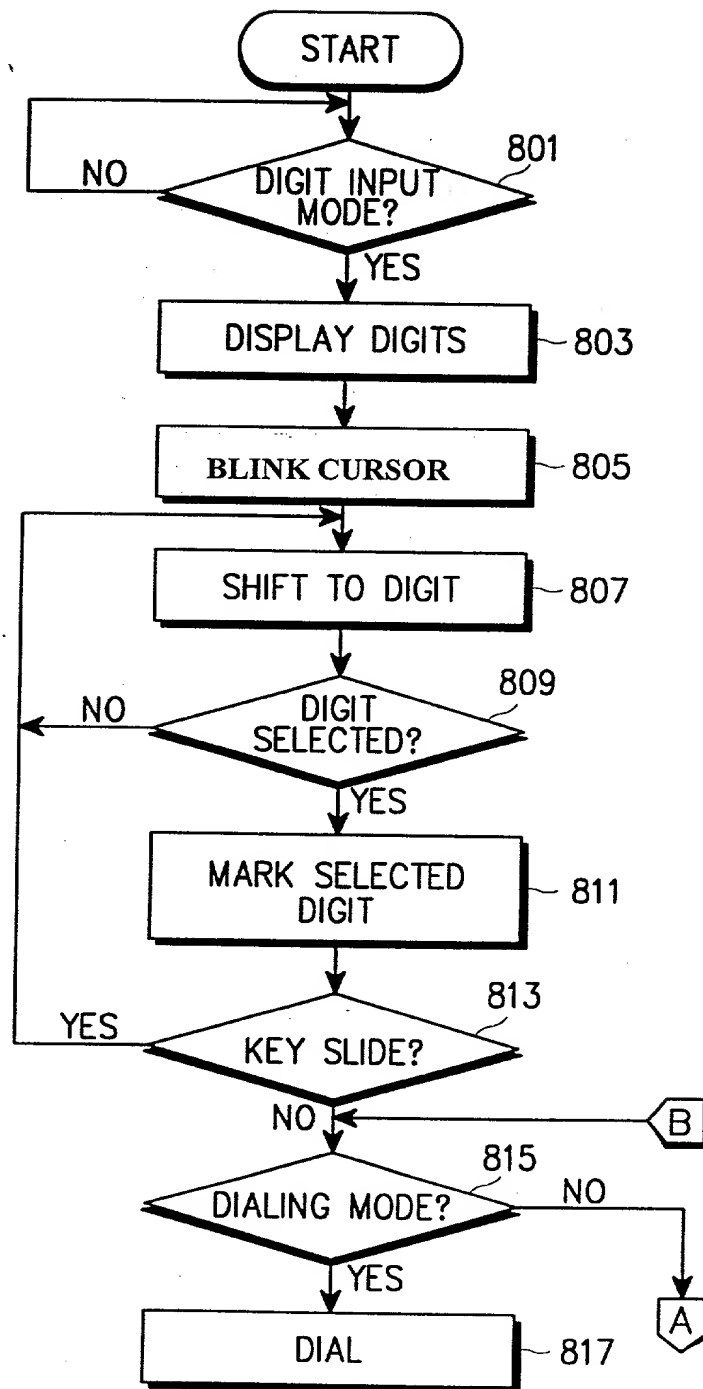


FIG. 8A

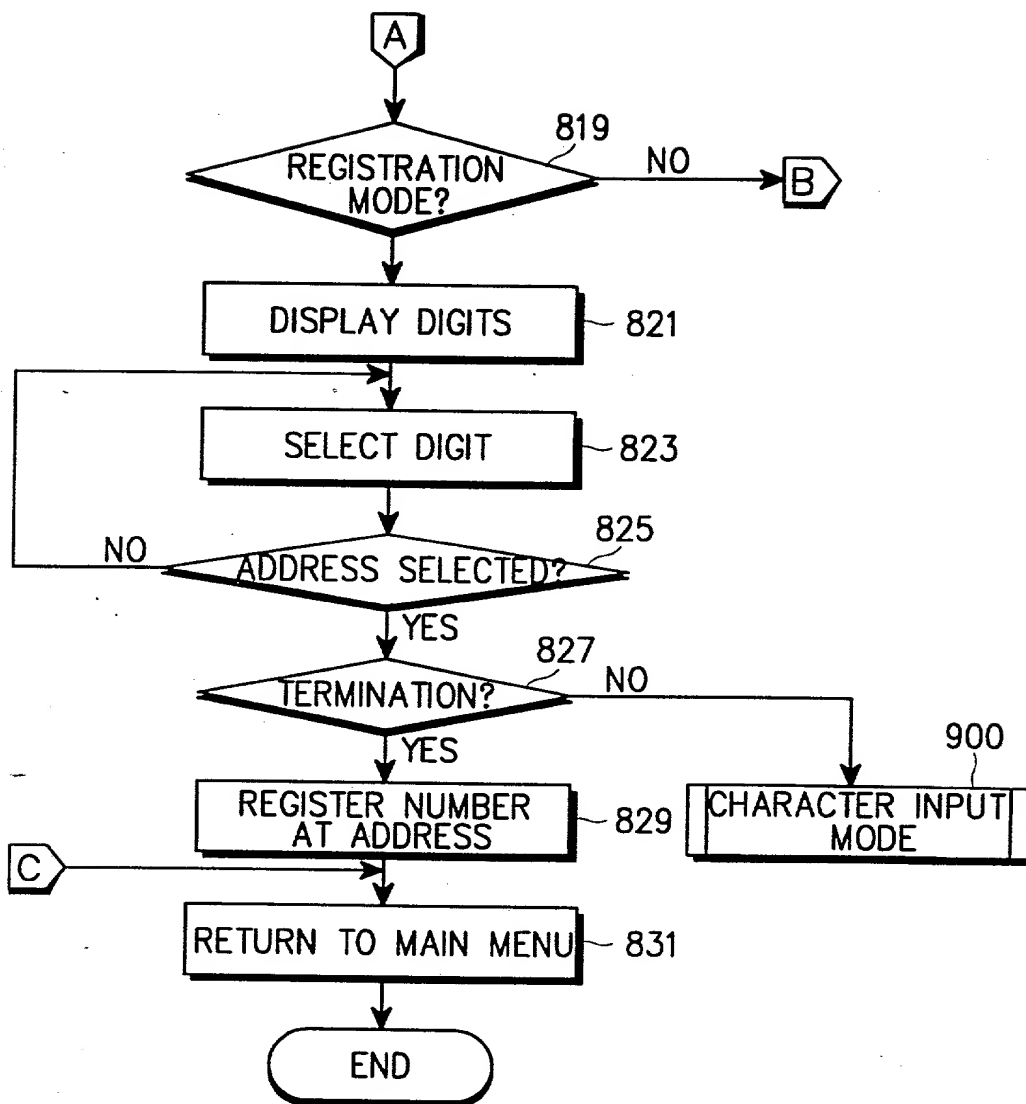


FIG. 8B



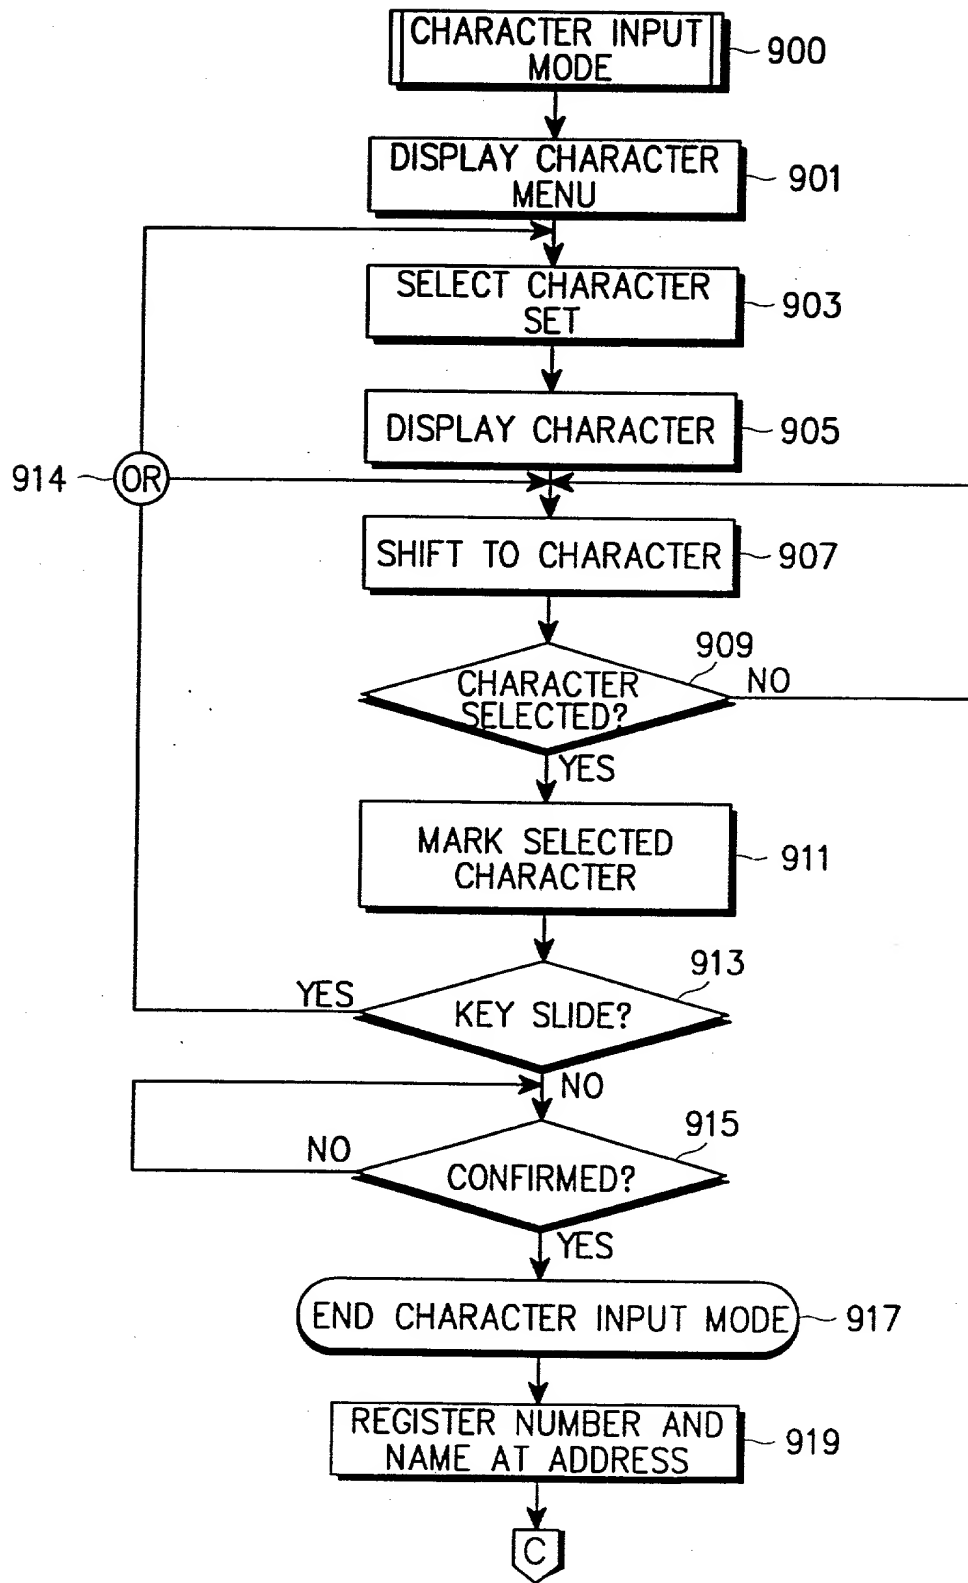


FIG. 8C



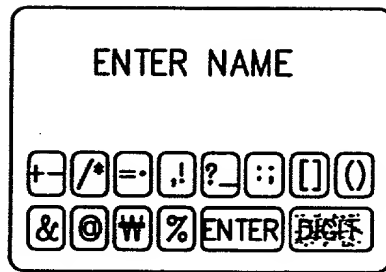


FIG. 9E

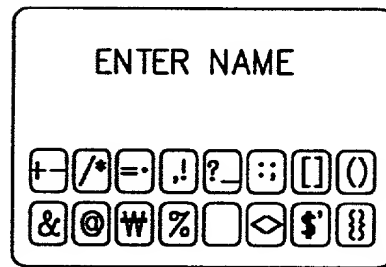


FIG. 9F

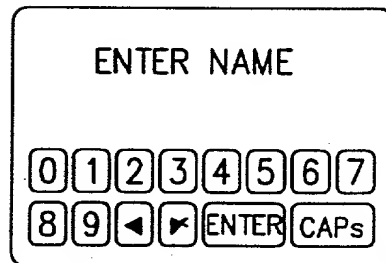


FIG. 9G


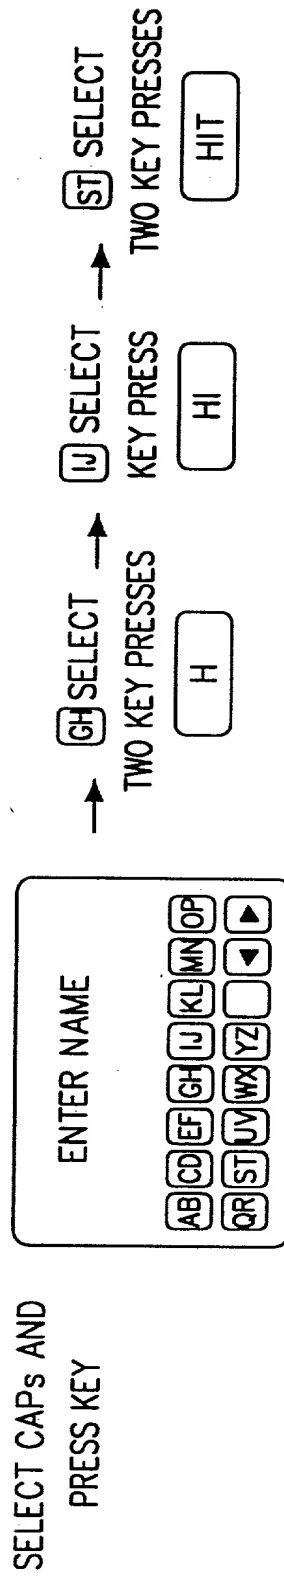


FIG. 10

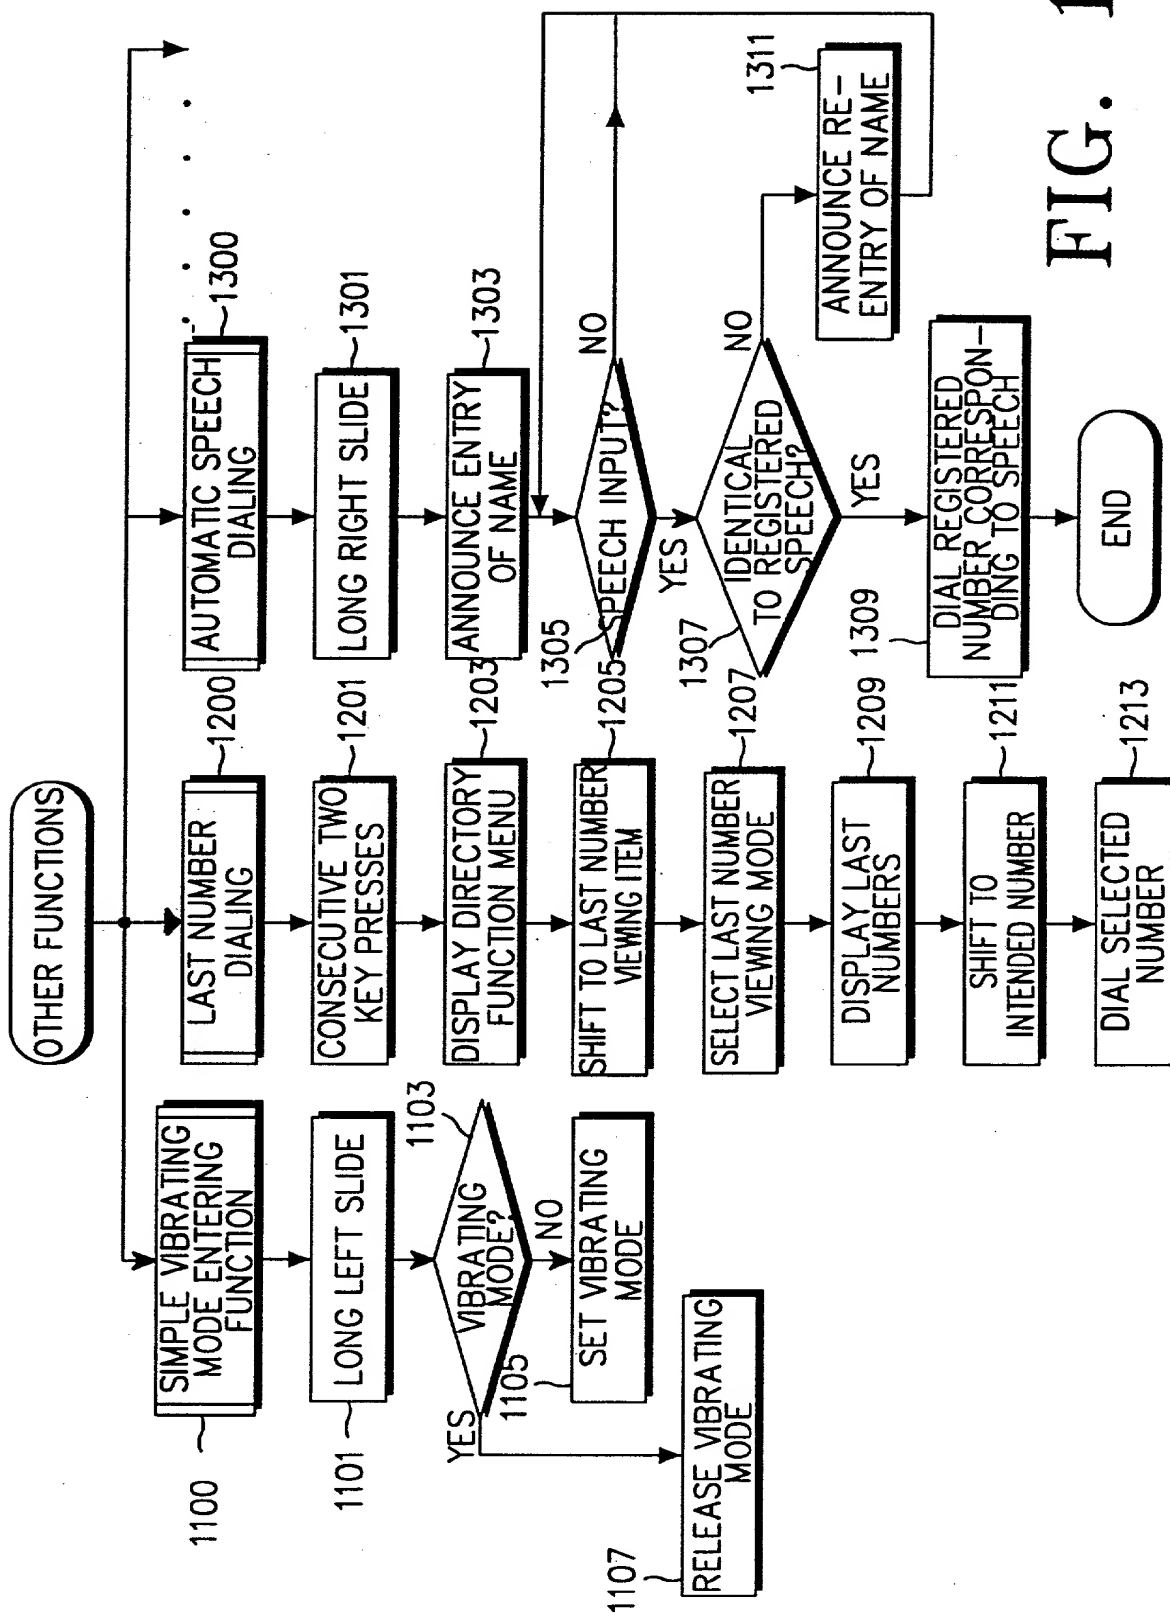

PTO/SB/01 (8/96)

## DECLARATION

Docket No. 678-458

AS A BELOW NAMED INVENTOR, I hereby declare that:

My residence, post office address and citizenship are as stated next to my name.

I believe that I am the original, first and sole (*if only one name is listed below*), or an original, first and joint inventor (*if plural names are listed below*), of the subject matter which is claimed and for which a patent is sought on the invention entitled:

TITLE: METHOD FOR USING MULTI-FUNCTION KEY IN A PORTABLE PHONE

the specification of which either is attached hereto or indicates an attorney docket no. \_\_\_\_\_, or:

[ ] was filed in the U.S. Patent &amp; Trademark Office on \_\_\_\_\_ and assigned Serial No. \_\_\_\_\_,

[ ] and (*if applicable*) was amended on \_\_\_\_\_.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to patentability and to the examination of this application in accordance with Title 37 of the Code of Federal Regulations 51.56. I hereby claim foreign priority benefits under Title 35, U.S. Code §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designated at least one country other than the United States, or §119(e) of any United States provisional application(s), listed below and have also identified below any foreign applications for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

1999-11667	Korea	02/04/1999	Priority Claimed:
(Application Number)	(Country)	(Day/Month/Year filed)	Yes [X] No [ ]
			Yes [ ] No [ ]
(Application Number)	(Country)	(Day/Month/Year filed)	

I hereby claim the benefit under Title 35, U.S. Code, §120, of any United States application(s), or §365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application(s) in the manner provided by the first paragraph of Title 35, U.S. Code, §112, I acknowledge the duty to disclose information material to patentability as defined in Title 37, The Code of Federal Regulations, §1.56(a) which became available between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial Number)	(Filing Date)	(STATUS: patented, pending, abandoned)
-----------------------------	---------------	--

(Application Serial Number)	(Filing Date)	(STATUS: patented, pending, abandoned)
-----------------------------	---------------	--

I hereby appoint the following attorneys: PETER G. DILWORTH, Reg. No. 26,450; ROCCO S. BARRESE, Reg. No. 25,263; DAVID M. CARTER, Reg. No. 30,949; PAUL J. FARRELL, Reg. No. 33,494; PETER DELUCA, Reg. No. 32,978; JEFFREY S. STEEN, Reg. No. 32,083; ADRIAN T. CALDFRONE, Reg. No. 31,746; GEORGE M. KAPLAN, Reg. No. 28,378; JOSEPH W. SCHMIDT, Reg. No. 36,920; RAYMOND E. FARRELL, Reg. No. 34,810; RUSSELL R. KASSNER, Reg. No. 36,183; CHRISTOPHER G. TRAINOR, Reg. No. 39,517; GEORGE LIKOUREZOS, Reg. No. 40,067; JAMES M. LOEFFLER, Reg. No. 37,873; EDWARD C. MEAGHER, Reg. No. 41,189; SUSAN L. HESS, Reg. No. 37,350; MICHAEL P. DILWORTH, Reg. No. 37,311; PETER S. SORELL, Reg. No. 44,349; and GLENN D. SMITH, Reg. No. 42,158, each of them of DILWORTH & BARRESE, 333 Earle Ovington Boulevard, Uniondale, New York 11553 to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected therewith and with any divisional, continuation, continuation-in-part, reissue or re-examination application, with full power of appointment and with full power to substitute an associate attorney or agent, and to receive all patents which may issue thereon, and request that all correspondence be addressed to:

Page 1 of 2

Paul J. Farrell, Esq.  
**DILWORTH & BARRESE**  
 333 Earle Ovington Boulevard  
 Uniondale, New York 11553  
 Tel. No.: (516) 228-8484

I HEREBY DECLARE that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under §1001 of Title 18 U.S. Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF FIRST OR SOLE INVENTOR: Sung-Hwa GONG Citizenship Korea  
 Inventor's signature: Sung-Hwa Gong Date: March 29, 2000  
 Residence & Post Office Address: 94-1, Imsu-dong, Kumi-shi, Kyongsangbuk do, Korea

FULL NAME OF SECOND JOINT INVENTOR: \_\_\_\_\_ Citizenship \_\_\_\_\_  
 Inventor's signature: \_\_\_\_\_ Date: \_\_\_\_\_  
 Residence & Post Office Address: \_\_\_\_\_

FULL NAME OF THIRD JOINT INVENTOR: \_\_\_\_\_ Citizenship \_\_\_\_\_  
 Inventor's signature: \_\_\_\_\_ Date: \_\_\_\_\_  
 Residence & Post Office Address: \_\_\_\_\_

FULL NAME OF FOURTH JOINT INVENTOR: \_\_\_\_\_ Citizenship \_\_\_\_\_  
 Inventor's signature: \_\_\_\_\_ Date: \_\_\_\_\_  
 Residence & Post Office Address: \_\_\_\_\_

FULL NAME OF FIFTH JOINT INVENTOR: \_\_\_\_\_ Citizenship \_\_\_\_\_  
 Inventor's signature: \_\_\_\_\_ Date: \_\_\_\_\_  
 Residence & Post Office Address: \_\_\_\_\_

FULL NAME OF SIXTH JOINT INVENTOR: \_\_\_\_\_ Citizenship \_\_\_\_\_  
 Inventor's signature: \_\_\_\_\_ Date: \_\_\_\_\_  
 Residence & Post Office Address: \_\_\_\_\_